


Specifications

Frequency:	806-960 MHz
Bandwidth:	70 MHz
Gain:	9 dBi
Horizontal Beamwidth:	54°
Vertical Beamwidth:	48°
F/B Ratio:	≥14
VSWR:	≤1.5
Impedance-Ω:	50
Polarization:	Vertical or Horizontal
Max Power:	100 W
Connector:	N Female or Customized
Length:	20" inches
Weight:	1.5 lbs.
Mount Mast Diameter:	Φ1.6" to 2.0"

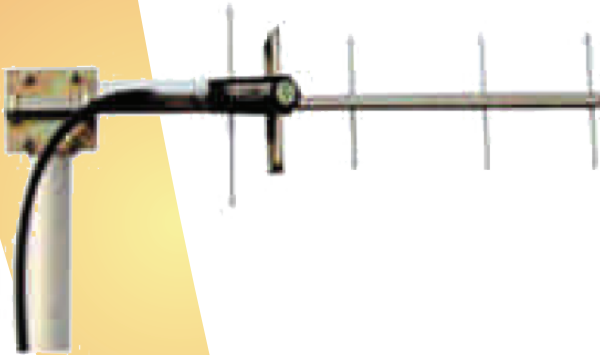

Applications

- 800/900MHz band
- GSM900/IS95 Mobile Communication System
- Point-to-Multipoint System
- RFID
- Repeater Station Receiving Antenna
- Long-distance Terminal Antenna

Features

- Broadband, High Gain, Low VSWR
- High Quality Stainless Steel Material
- Simple Structure, Stable
- All-Weather Option
- Extending Cable
- Vertical or Horizontal Polarization Mounting